

Part* Number	Relay Description
M33-2N	Solid State Relay With High Surge Current Capability

* The Y suffix denotes parameters tested to MIL-PRF-28750 specifications. The W suffix denotes parameters tested to Teledyne Specifications.

ELECTRICAL SPECIFICATIONS

(-55°C to +125°C UNLESS OTHERWISE NOTED)

INPUT (CONTROL) SPECIFICATIONS

	Min	Typ	Max	Units
Control Current @ 5 Vdc (Note 5)			80	µA
Control Voltage Range			6.5	Vdc
Bias Supply Range V _{DD} (Note 7)	4.5		5.5	Vdc
Bias Current			16	mA
Turn-Off (Guaranteed Off)			0.4	Vdc
Turn-On (Guaranteed On)	2.0			Vdc

Output (LOAD) SPECIFICATIONS

	Min	Typ	Max	Units
Continuous Output Current (See Figure 1)	@25°C (Case)		7.0	A
	@120°C (Case)		3.0	A
Pulse/Surge Current (See Notes 1,2,3 Fig. 4)	@100µs		100	A
	@100ms		23.5	A
Operating Output Voltage			60	Vdc
Continuous Blocking Voltage			80	Vdc
On-State Resistance R _{ds} (on) (Note 4)			0.09	Ohm
Turn-On Time (Figure 2)			60	µs
Turn-Off Time (Figure 2)			3.0	ms
Off-State Leakage at 60 Vdc	@25°C		10	µA
	@125°C		100	µA
Off-State Leakage at 80 Vdc	@25°C		1.0	mA
Capacitance Across Output @V _{DS} = 25Vdc F = 1.0MHz			1700	pF
Insulation Resistance @ 500Vdc	10 ⁹			Ohm
Capacitance (Input to Output at 1KHz)			15	pF
Dielectric Strength, Input to Case			1000	Vrms
Input to Output, Output to Case				
Thermal Resistance Junction To Ambient (θ _{JA})			35	°C/W
Thermal Resistance Junction To Case (θ _{JC})			7	°C/W





FEATURES


- Up to 100 Amp pulse load capability
- Fast switching speed
- Low ON resistance
- Power FET output
- Transformer Isolated
- TTL or CMOS logic compatible input control
- Low-profile metal DIP, hermetically sealed
- Meets 80V surge and ±600V spike requirements
- Built and tested to requirements of MIL-PRF-28750

DESCRIPTION


The M33-2N is a military-style DC solid-state relay designed specifically for high-current pulse load applications. This device is constructed utilizing state-of-the-art solid-state techniques and features the latest power FET output technology to minimize ON resistance. This feature provides minimum output voltage drop and allows the M33-2N to switch high pulse currents up to 100 amps at higher temperatures than those allowable with bipolar devices. The input and output are magnetically isolated to protect delicate input logic circuits from output voltage transients. The M33-2N is designed to switch loads on MILSTD- 704 28 Vdc power systems, and meets 80V surge and ±600V spike requirements. The M33-2N is packaged in a low-profile hermetically sealed 22-pin DIP.

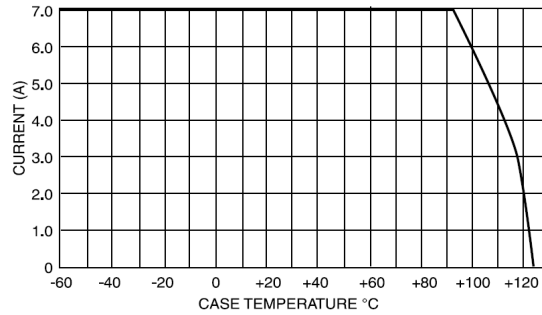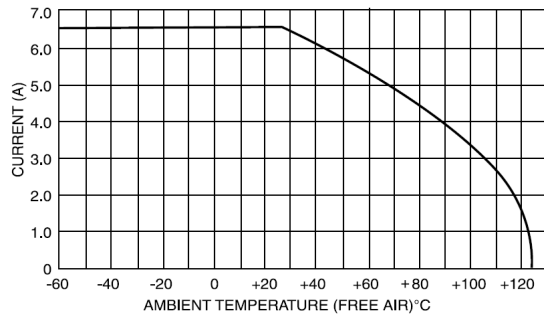

LOAD CURRENT DERATING CURVE
FIGURE 1

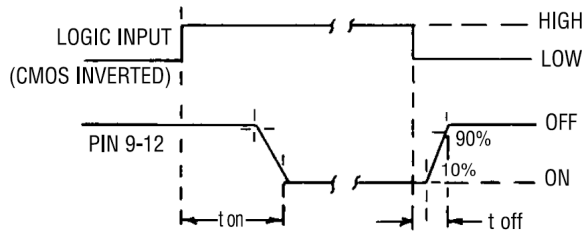


TIMING DIAGRAM
FIGURE 2

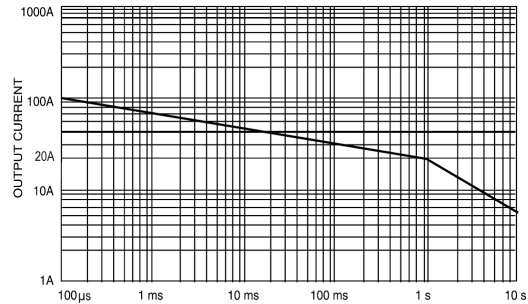

MAX OUTPUT CURRENT VS TIME
-55°C TO +100°C CASE
FIGURE 3

MECHANICAL SPECIFICATIONS


DIMENSIONS ARE SHOWN IN INCHES (MILLIMETERS)

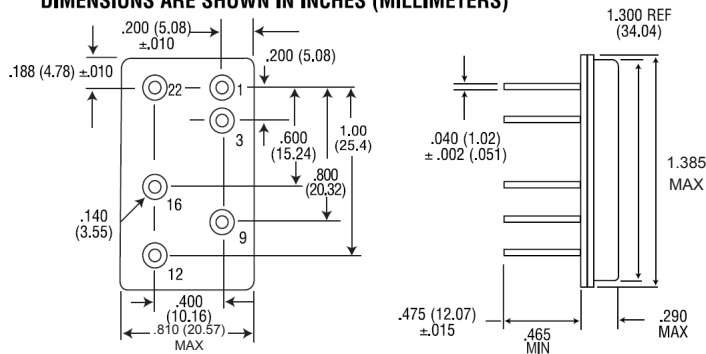

- Enclosure: 22 Pin DIP, Hermetically Sealed
- Leak Rate: 1×10^{-8} CC/Sec Maximum
- Material: Header: Cold Rolled Steel Nickel Plated
Pins: Copper Core, Alloy #52 Clad Gold Plated
- Weight: 20 grams maximum

NOTES:

1. 100 Amp max for 100 µsec pulse, non-repetitive.
2. 23.5 Amps, 100 msec pulse, 47 Vdc, 2 Ω load, 30 times at 2% duty cycle, 5 seconds between pulses.
3. 17.5 Amp, 100 msec pulse, 35 Vdc, 2 Ω load, 120 times at 1 second intervals, 10% duty cycle.
4. On-state resistance measured at 22A, 300 µsec pulse, 10Hz repetition rate, for test purposes only, not a continuous operating condition.
5. Input transitions are to be less than 1.0 msec duration.
6. Inductive loads should be diode suppressed.
7. For test purposes, input bias voltage shall be 5.0 Vdc.
8. The maximum recommended solder temperature is 220°C for 4 seconds.



HEADER PINOUTS
(BOTTOM VIEW)

ENVIRONMENTAL SPECIFICATIONS.

	Min	Typ	Max	Units
Temperature Range				
Operating	-55		+125	°C
Storage	-55		+125	°C
Vibration 100g	10		3000	Hz
Constant Acceleration			5000	g
Shock, 0.5 ms			1500	g